



## Remote Generator Panel

This manual contains important safety instructions for the Remote Generator Panel, CORD16DEK. READ SAFETY WARNINGS AND OPERATING INSTRUCTIONS CAREFULLY, SAVE THESE INSTRUCTIONS.



### DANGER

#### Electrocution hazard - Electricity can cause DEATH or SERIOUS INJURY.

- Use this product only in accordance with the safety labels on the cord and the user instructions provided.
- Power cords and electrical equipment pose a risk of shock and electrocution, especially if they are operated in wet conditions. Inspect all equipment prior to every use and use only as directed by the manufacturer.
- This output panel is for use in dry locations only and is not safe to operate in wet conditions. Output panel must be kept dry and protected from exposure to moisture.
- Do not use cord reel or generator near standing water.
- Use an outlet with GFCI protection when using power outdoors or when moisture is present.
- Test GFCI outlets each time the product is used.
- Properly ground the power source and verify ground is in place before each use. Grounding regulations vary by location, consult a qualified local electrician for proper grounding instructions.
- Generators vibrate in normal use. During and after the use of the generator, inspect the generator as well as extension cords and power supply cords connected to it for damage resulting from vibration. Have damaged items repaired or replaced as necessary. Do not use plugs or cords that show signs of damage such as broken or cracked insulation or damaged blades.



### DANGER

#### CARBON MONOXIDE GAS

Using a generator indoors **CAN KILL YOU IN MINUTES**. Generator exhaust contains carbon monoxide (CO). This is a poison you cannot see or smell. If you can smell the generator exhaust, you are breathing CO. But even if you cannot smell the exhaust, you could be breathing CO.

**NEVER** use a generator inside homes, garages, crawlspaces, or other partly enclosed areas. Deadly levels of carbon monoxide can build up in these areas. Using a fan or opening windows and doors does **NOT** supply enough fresh air.

**ONLY** use a generator outside and far away from windows, doors, and vents. These openings can pull in generator exhaust. Even when you use a generator correctly, CO may leak into the home. **ALWAYS** use a battery-powered or battery backup CO alarm in the home.

If you start to feel sick, dizzy, or weak after the generator has been running, move to fresh air **RIGHT AWAY**. See a doctor. You could have carbon monoxide poison.

#### HAVE QUESTIONS OR NEED HELP?

call our help-line: [1] 919-550-3259 or go to [www.portablegenerator911.com](http://www.portablegenerator911.com) or [www.GXiOutdoorPower.com](http://www.GXiOutdoorPower.com)

#### Special Requirements

There may be Federal or State Occupational Safety and Health Administration (OSHA) regulations, local codes, or ordinances that apply to the intended use of this product. Please consult a qualified electrician, electrical inspector, or the local agency having jurisdiction.

#### SAFETY LABEL LOCATIONS


These labels warn you of potential hazards that can cause serious injury. Read them carefully. If a label comes off or becomes hard to read, contact your DEK generator dealer for a replacement. Use the product only in accordance with the safety labels on the cord.

#### User Instructions

- Place cord reel indoors in a dry location.
- Do not use cord reel or generator near standing water.
- Inspect thoroughly before each use. DO NOT USE IF DAMAGED.
- Look for the NUMBER OF WATTS on appliances to be plugged in to cord.
- Do not exceed 30 amps or 7200 watts total load on the cord set. Distribute loads evenly between the A and B circuits.
- Do not exceed 20 amps or 2400 watts on the 120 volt outlets. GFCI breakers do not protect the product from overload conditions.
- Do not run cord through doorways, holes in ceilings, walls or floors.
- Make sure appliances are turned off before connecting to outlets.
- Fully insert plugs into outlets.
- Do not remove bend or modify any of the blades on the plug end of the cord.
- Do not use excessive force to make connections
- Keep Children and pets away from cord
- Avoid overheating, uncoil cord and do not cover the cord with any material.
- Do not place objects on the cord or cord reel .
- Do not drive vehicles or hand carts over cord.
- Do not walk on cord.

#### After Use

- Grasp plug to remove from outlet.
- Always store indoors.
- Always unplug when not in use.
- Do not unplug by pulling on cord

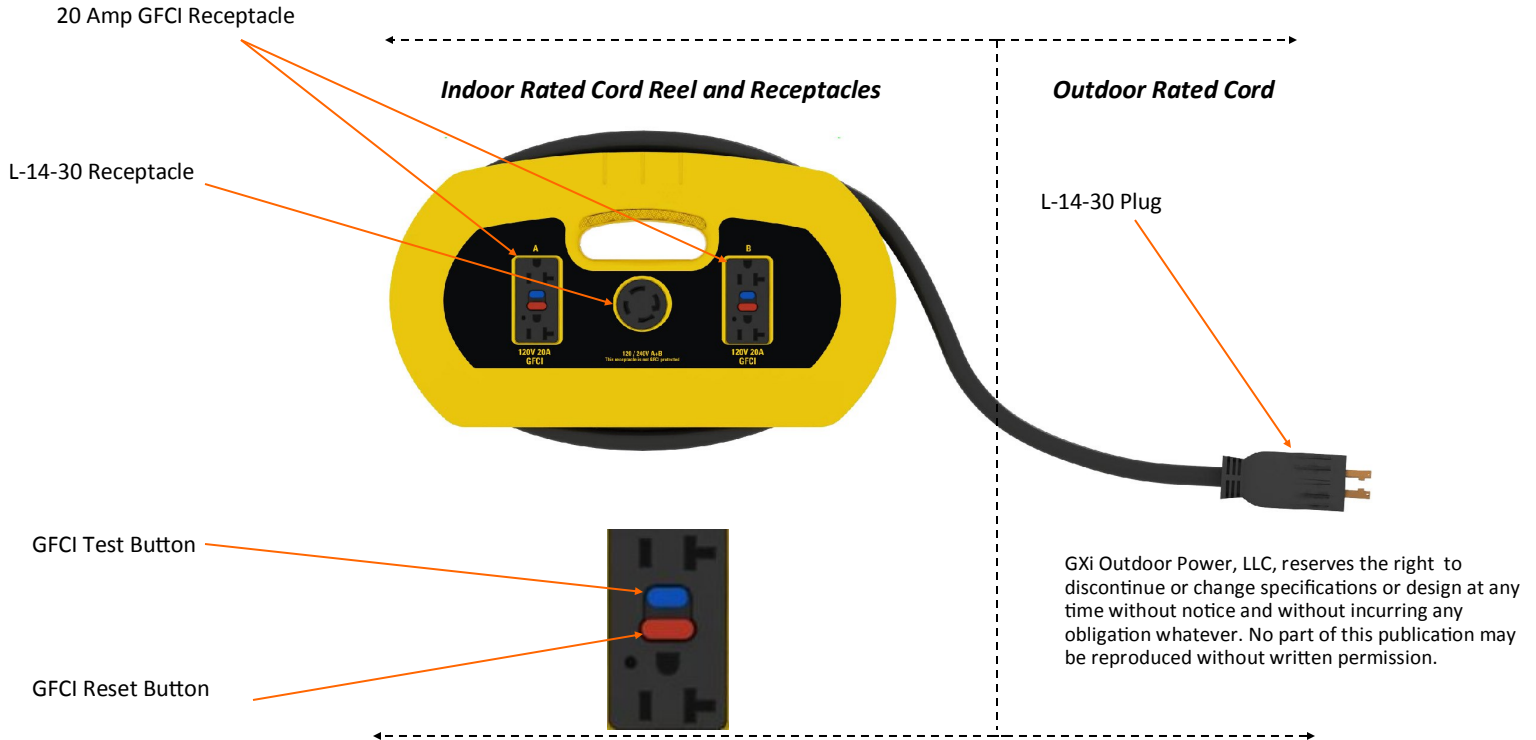

## Accessory Limited Warranty

PRODUCTS COVERED BY THIS WARRANTY:	LENGTH OF WARRANTY:*		
	(FROM THE DATE OF ORIGINAL RETAIL PURCHASE)		
	RESIDENTIAL	COMMERCIAL	RENTAL
GFCI Remote Generator Panel	3 Months	30 Days	30 Days

### TO QUALIFY FOR THIS WARRANTY:

The product must be purchased in the United States from a dealer authorized by GXi Outdoor Power, LLC to sell those products. This warranty applies to first retail purchaser / owner during the applicable warranty time period. **SAVE YOUR PROOF OF PURCHASE RECEIPT.**

### WHAT GXI OUTDOOR POWER LLC WILL REPAIR OR REPLACE UNDER WARRANTY:

GXI OUTDOOR POWER LLC will repair or replace, at its option, any part that is proven to be **defective in material or workmanship** under normal use during the applicable warranty time period subject to the exclusions stated herein. This warranty is void if the owner fails to follow the prescribed maintenance and operating procedures described in this manual. This specifically refers to ensuring that the product is not overloaded, and that the product is used and stored in the proper environment. Water damage or overload damage to the GFCI outlets is not covered under this warranty.

GXI OUTDOOR POWER LLC has the right to recover warranty administration costs from the owner if the root cause of the malfunction was found to be other than defective material or workmanship. In particular, this warranty does not cover: damage caused by not following the prescribed warnings and operating practices; failure to follow proper maintenance and storage procedures; and physical damage due to shipping or handling or storage. Damage to the product that occurs as a result of connecting a DEK accessory in a manner that is not within the National Electrical Code is not covered by this warranty.

Anything replaced under warranty becomes the property of GXI OUTDOOR POWER LLC. Parts replaced under warranty will be considered as part of the original product and any warranty on those parts will expire coincident with the original product warranty.

### To Obtain Warranty Service

To locate your nearest authorized service center, warranty information, replacement parts, or for general customer service, please call 1-919-550-3259. You must send the DEK product, accessory, replacement part, apparel or the power equipment on which the accessory or replacement part is installed, and proof of purchase, at your expense, to any DEK service location in the United States, who is authorized to service that product, during the service location's normal business hours. If you are unable to obtain warranty service, or are dissatisfied with the warranty service you receive, take the following steps: First, contact the manager of the service center involved; normally this will resolve the problem. However, if you should require further assistance, write or call the GXi Parts & Service, LLC 1-919-550-3259.

### EXCLUSIONS:

THIS WARRANTY DOES NOT EXTEND TO PARTS AFFECTED OR DAMAGED BY ACCIDENT AND/OR COLLISION, NORMAL WEAR, CONTAMINATION, USE IN AN APPLICATION FOR WHICH THE PRODUCT WAS NOT DESIGNED OR ANY OTHER MISUSE, NEGLIGENCE, INCORPORATION OR USE OF UNSUITABLE ATTACHMENTS OR PARTS, UNAUTHORIZED ALTERATION, OR ANY CAUSES OTHER THAN DEFECTS IN MATERIAL OR WORKMANSHIP OF THE PRODUCT.

### DISCLAIMER OF CONSEQUENTIAL DAMAGE AND LIMITATION OF IMPLIED WARRANTIES:

GXI OUTDOOR POWER LLC DISCLAIMS ANY RESPONSIBILITY FOR LOSS OF TIME OR USE OF THE PRODUCT, TRANSPORTATION, COMMERCIAL LOSS, OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGE. ANY IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THIS WRITTEN LIMITED WARRANTY.

This warranty is void if the manufacturing date and the serial number on the equipment has been removed or the equipment has been modified.